

Harborough District Council

Level 2 Strategic Flood Risk Assessment

Detailed Site Summary Table

Site details

| | |
|---------------------------------|--|
| Site Code | 10649: Proposed Allocation U1 |
| Address | Land south of Ashby Road, Ullesthorpe |
| Area | 2.3 hectares |
| Current land use | Greenfield, agricultural |
| Proposed land use | Residential |
| Flood Risk Vulnerability | More vulnerable |

Sources of flood risk

| | |
|-----------------------------------|---|
| Location of the site | <p>The site is located within the southwest of Harborough District, on the eastern edge of Ullesthorpe. The site entrance is located along Ashby Road via Field View.</p> <p>The site is located approximately 950m east of an unnamed tributary of the River Soar, which drains a rural catchment of approximately 2km². The site is located at the upstream end of the River Soar catchment, with the Soar's source located 3km southwest of the site.</p> |
| Topography | <p>The Environment Agency's (EA) 1m resolution 2022 Composite LiDAR shows that the topography of the site steeply declines from approximately 123mAOD within the northwestern side of the site, to approximately 118mAOD at the southeastern side before increasing again to approximately 121m AOD at the eastern site boundary. This creates a small valley/topographical depression through the eastern half of the site.</p> |
| Existing drainage features | <p>No drainage features have been identified via mapping on site; however, LiDAR indicates it is likely a drainage ditch flows through the valley within the site. An investigation into possible drainage features should be undertaken prior to development.</p> |

| | |
|---|--|
| <p>Fluvial</p> | <p>Available data and mapping: EA Flood Map for Planning for Rivers and Sea.</p> <p>Data analysis: Details of the sites location within each Flood Zone are provided within the SFRA Site Screening Appendix.</p> <p>Flood characteristics: The site is entirely located within Flood Zone 1. Flood Zone 1 represents areas which have less than 1 in 1000 (0.1%) chance of river flooding in a given year.</p> |
| <p>Fluvial plus climate change</p> | <p>The site is at very low risk of fluvial flooding and there are no significant watercourses within the vicinity of the site that could cause a risk of flooding.</p> |
| <p>Surface water</p> | <p>Available data and mapping: The EA's Risk of Flooding from Surface Water dataset for the 3.3%, 1% and 0.1% AEP events.</p> <p>Data analysis:</p> <p>3.3% AEP (1 in 30 year) event: Proportion is 3% Max Depth is 0.34m Max Velocity is 0.99m/s Max Hazard is 1.26, Danger to Most</p> <p>Mean Depth is 0.11m Mean Velocity is 0.51m/s Mean Hazard is 0.62, Caution</p> <p>1% AEP (1 in 100 year event): Proportion is 8% Max Depth is 0.38m Max Velocity is 1.36m/s</p> |

| | |
|---|--|
| | <p>Max Hazard is 1.34, Danger to Most</p> <p>Mean Depth is 0.11m Mean Velocity is 0.65m/s Mean Hazard is 0.63, Caution</p> <p>0.1% AEP (1 in 1000 year) event: Proportion is 19% Max Depth is 0.54m Max Velocity is 1.68m/s Max Hazard is 1.68, Danger to Most</p> <p>Mean Depth is 0.16m Mean Velocity is 0.98m/s Mean Hazard is 0.78, Danger to Some</p> <p>Flood characteristics: The site is at risk of surface water flooding across the eastern half of the site in all surface water events ranging from 3% of the site flooded during the 3.3% AEP event, up to 19% within the 0.1% AEP event. A flow path is shown to cross from the northeast to the south following the valley topographical depression across the eastern portion of the site during the 1% and 0.1% AEP events, with localised areas of flooding within the depression during the 3.3% AEP event. The average depth, velocity and hazard during the 0.1% AEP event is shown to be 0.16m, 0.98m/s and a 'Danger to Some' respectively.</p> |
| <p>Surface water plus climate change</p> | <p>Available data and mapping: The EA's Risk of Flooding from Surface Water dataset for the 3.3% and 1% AEP events with both upper and central climate change scenarios.</p> <p>Management Catchment: The site is located within the Soar Management Catchment. The EA guidance recommends that the Upper End allowance is considered for both the 3.3% and 1% AEPs for the 2070's epoch, unless the allowance for the</p> |

2050's epoch is higher, in which case this should be used. This is appropriate for development with a lifetime beyond 2100. The recommended uplift on peak rainfall intensity for the 3.3% AEP central and upper estimates are 25% and 35%, and 25% and 40% for the 1% AEP event.

Data analysis:

3.3% AEP (1 in 30 year) central climate change event:

Proportion is 14%

Max Depth is 0.44m

Max Velocity is 1.58m/s

Max Hazard is 1.47, Danger to Most

Mean Depth is 0.12m

Mean Velocity is 0.79m/s

Mean Hazard is 0.68, Caution

3.3% AEP (1 in 30 year) upper climate change event:

Proportion is 15%

Max Depth is 0.46m

Max Velocity is 1.63m/s

Max Hazard is 1.51, Danger to Most

Mean Depth is 0.13m

Mean Velocity is 0.83m/s

Mean Hazard is 0.7, Caution

1% AEP (1 in 100 year) central climate change event:

Proportion is 18%

Max Depth is 0.52m

Max Velocity is 1.65m/s

Max Hazard is 1.64, Danger to Most

| | |
|---------------------------|---|
| | <p>Mean Depth is 0.15m Mean Velocity is 0.95m/s Mean Hazard is 0.76, Danger to Some</p> <p>1% AEP (1 in 100 year) upper climate change event: Proportion is 19% Max Depth is 0.55m Max Velocity is 1.73m/s Max Hazard is 1.71, Danger to Most</p> <p>Mean Depth is 0.17m Mean Velocity is 1.01m/s Mean Hazard is 0.8, Danger to Some</p> <p>Flood characteristics: During the surface water climate change events up to 19% of the site is shown to flood along the eastern half of the site during the 1% AEP upper climate change event. The flow path crosses the site from northeast to south in all events, with an average depth, velocity and hazard of 0.17m, 1.01m/s and a 'Danger to Some' within the 1% AEP upper climate change event. The most significant flood depths are located in a localised area to the south of the site within the topographical depression.</p> |
| <p>Reservoir</p> | <p>The site is not located in a Wet or Dry day reservoir flooding extent, according to the EA's reservoir flood mapping.</p> |
| <p>Groundwater</p> | <p>Available data and mapping: The JBA Groundwater Flood Data Map (GW5) is provided as a 5m resolution grid.</p> <p>Flood characteristics: The site is located within a zone where there is negligible risk of groundwater flooding due to the nature of local geological deposits.</p> |

| | |
|----------------------|---|
| Sewers | Sewer flood records from Severn Trent Water were unavailable and therefore cannot be assessed as part of this assessment. However, Ullesthorpe is located within the Severn Trent Water DWMP as part of the Claybrooke Magna catchment. The catchment has been identified as a medium-short term priority with stormwater overflow concerns, therefore the risk of sewer flooding should be assessed within a site-specific flood risk assessment prior to development. |
| Flood history | The site is not shown to be located within the EA's Recorded Flood Outlines extent. |

Flood risk management infrastructure

| | |
|---------------------------|--|
| Existing defences | The EA's AIMS spatial flood defences dataset shows there are no formal flood defences within the vicinity of the site. |
| Potential defences | The EA's AIMS spatial flood defences dataset shows that there are no potential defences in or near the site. |
| Residual risk | There are no residual risks to the site. |

Emergency planning

| | |
|--------------------------|---|
| Flood warning | The site has not been identified to be located within an EA Flood Warning or Flood Alert Area. |
| Access and egress | <p>Access and egress are achievable via Ashby Road during all surface water events, including the 1% AEP plus central and upper climate change events, as flood depths remain less than 0.3m. It should however be noted that access and egress would be affected within the eastern corner of the site, with the flow path isolating a small eastern area. This should therefore be considered within a site-specific flood risk assessment, with development plans potentially avoiding development within this eastern corner.</p> <p>Developers will need to demonstrate safe access and egress in the 1% AEP surface water event including an allowance for climate change (the design event). It should be noted that raising of access routes must not impede surface water flow paths or lead to an increased risk elsewhere.</p> |

Requirements for drainage control and impact mitigation

Broad-scale assessment of possible SuDS

Geology and Soils

The geology consists of:

- Bedrock geology of mudstone, siltstone and sandstone.
- Sand and gravel superficial deposits identified within the BGS mapping at the proposed development site.

The soils on site are shown to be slowly permeable seasonally wet slightly acid but base-rich loamy and clayey soils. This suggests that infiltration may be a viable means of surface water disposal.

SuDS

- JBA Groundwater mapping suggests the site is at 'low risk' of groundwater flooding during a 1% AEP flood event, however infiltration may not always be appropriate. Offsite discharge may therefore be required to discharge surface water runoff during flood events. The infiltration potential of the site should be confirmed through infiltration testing, in line with BRE 365.
- The site is located within a Nitrate Vulnerable Zone. Therefore, early engagement with the LLFA and the EA is recommended to determine requirements for the site to manage the impact to surrounding watercourses. Consideration of water quality is likely to be of high importance and demonstrated through the use of the Simple Index Approach.
- The site has not been identified to be located within a historic landfill site or Source Protection Zone.
- SuDS measures should follow the discharge hierarchy, and if it is proposed to discharge runoff to a watercourse or sewer system, the condition and capacity of the receiving watercourse or asset should be confirmed through surveys and the discharge rate agreed with the asset owner.
- Due to the topography, any surface water not intercepted via infiltration will drain via gravity to the centre of the site. It is therefore recommended that the LLFA and the EA are consulted about viable

| | |
|--|---|
| | <p>discharge locations for surface water from the site and their attenuation potential.</p> |
| <p>Opportunities for wider sustainability benefits and integrated flood risk management</p> | <ul style="list-style-type: none"> • Implementation of SuDS at the site could provide opportunities to deliver multiple benefits including volume control, water quality, amenity and biodiversity, helping meet requirements for the Nitrate Vulnerable Zone. This could provide wider sustainability benefits to the site and surrounding area. Proposals to use SuDS techniques should be discussed with relevant stakeholders (LPA, LLFA and EA) at an early stage to understand possible constraints. • The design of the surface water management proposals should take into account the impacts of future climate change over the projected lifetime of the development. • Opportunities to incorporate source control techniques such as green roofs, permeable surfaces and rainwater harvesting must be considered in the design of the site. • SuDS are to be designed so that they are easy to maintain, and it should be set out who will maintain the system, how the maintenance will be funded and should be supported by an appropriately detailed maintenance and operation manual. • SuDS should be designed with a holistic approach, combining ecology, landscape and drainage requirements specific to the site, and incorporating Biodiversity Net Gain requirements. • Opportunities to incorporate filtration techniques such as filter strips, filter drains and bioretention areas must be considered. Consideration should be made to the existing condition of receiving waterbodies and their Water Framework Directive objectives for water quality. The use of multistage SuDS treatment will improve water quality of surface water runoff discharged from the site and reduce the impact on receiving water bodies. • The potential to utilise conveyance features such as swales to intercept and convey surface water runoff should be considered. |

| | |
|--|--|
| | <p>Conveyance features should be located on common land or public open space to facilitate ease of access.</p> <ul style="list-style-type: none"> • SuDS should be designed in line with Leicestershire County Council's SuDS Guidance. |
|--|--|

NPPF and planning implications

| | |
|--|---|
| <p>Exception Test requirements</p> <p>(Local Authority Considerations)</p> | <p>The Local Authority will need to confirm that the Sequential Test has been carried out in line with national guidelines. The Sequential Test will need to be passed before the Exception Test is applied.</p> <p>The NPPF classifies the usage as “More Vulnerable”, this type is taken into consideration for the Exception Test. The site, is entirely located within Flood Zone 1, therefore it is not required to pass the Exception Test.</p> <p>However, given the significant risk of surface water flooding to the site, it should be considered to avoid development in areas at risk, with existing flow paths retained and incorporated into site design. Harborough District Council should carefully weigh the benefits of development against the risk and satisfy themselves that residents will be safe for the lifetime of the development.</p> |
| <p>Requirements and guidance for site-specific Flood Risk Assessment</p> <p>(Developer considerations)</p> | <p>Flood Risk Assessment:</p> <p>The Level 1 SFRA has more guidance on this section and any relevant policies and information applicable to development within Harborough District Council.</p> <ul style="list-style-type: none"> • A site-specific flood risk assessment should be prepared for the site, supported by detailed surface water modelling, to demonstrate that site users will be safe for the lifetime of the development, development of the site will not increase risk elsewhere, and any residual risk can be safely managed. • Given the surface water risk to the site, a site drainage strategy should be prepared alongside the flood risk assessment. • Consultation with Harborough District Council, Leicestershire County Council, and the EA should be undertaken at an early stage. |

- Developers should consult with Severn Trent Water to ensure that the development aims to help achieve the targets of the Drainage and Wastewater Management Plan.
- Development plans should use the Level 1 SFRA for Harborough District Council, as well as the Local Flood Risk Management Strategies to identify cumulative flood risk issues. It should also promote an integrated approach to water management.

Guidance for site design and making development safe:

- The developer will need to show, through an FRA, that future users of the development will not be placed in danger from flood hazards throughout its lifetime. It is for the applicant to show that the development meets the objectives of the NPPF's policy on flood risk. For example, how the operation of any mitigation measures can be safeguarded and maintained effectively through the lifetime of the development. (Para 048 Flood Risk and Coastal Change PPG).
- The risk from surface water flow routes should be quantified as part of a site-specific FRA, including a drainage strategy, so runoff magnitudes from the development are not increased by development across any ephemeral surface water flow routes. A drainage strategy should help inform site layout and design to ensure runoff rates do not exceed greenfield rates.
- Arrangements for safe access and egress are likely to be possible across the majority of the site with a small area to the east of the site likely to be affected due to a flow path bisecting the site. Access and egress with therefore need to be considered further within a site-specific FRA for the surface water events with an appropriate allowance for climate change, using the depth, velocity, and hazard outputs.

Key messages

The site is generally identified to be at low risk, although a significant surface water flow path runs through the site, and development is likely to progress if:

- A site-specific FRA, supported by detailed surface water modelling, is undertaken to assess the risk of surface water flooding in relation to the proposed development, and the access

and egress arrangements. Developers will need to demonstrate safe access and egress in the 1% AEP + climate change surface water event.

- A carefully considered and integrated flood resilient and sustainable drainage design is put forward, including a site-specific Surface Water Drainage Strategy, and SuDS maintenance and management plan and supported by detailed modelling (as above), with development to be steered away from the areas identified to be at highest risk of surface water flooding within the site. This is to be in line with the sequential approach to site layout.
- There is early engagement with the LLFA and the EA on the proposed SuDS measures and infiltration rate to discuss requirements on the site meeting relevant conditions due to the sites location within a Nitrate Vulnerable Zone.

Mapping information

The key datasets used to make planning recommendations for this site were the EA’s Flood Map for Planning and the EA’s Risk of Flooding from Surface Water map. More details regarding data used for this assessment can be found below.

| | |
|---|---|
| Flood Zones | Flood Zones 2 and 3 have been taken from the EA’s Flood Map for Planning mapping. |
| Climate change | The latest climate change allowances (updated May 2022) have been applied to the EA’s RoFSW dataset. |
| Surface water | The EA’s Risk of Flooding from Surface Water (RoFSW) map has been used to define areas at risk from surface water flooding. |
| Surface water depth, velocity and hazard mapping | The EA’s Risk of Flooding from Surface Water (RoFSW) has been used to define areas at risk from surface water flooding. |

Level 2 Surface Water Flood Risk

Harborough District Council
Level 1 Strategic Flood
Risk Assessment




Legend

10649

Risk of Flooding from Surface
Water

- 3.3% AEP
- 1% AEP
- 0.1% AEP

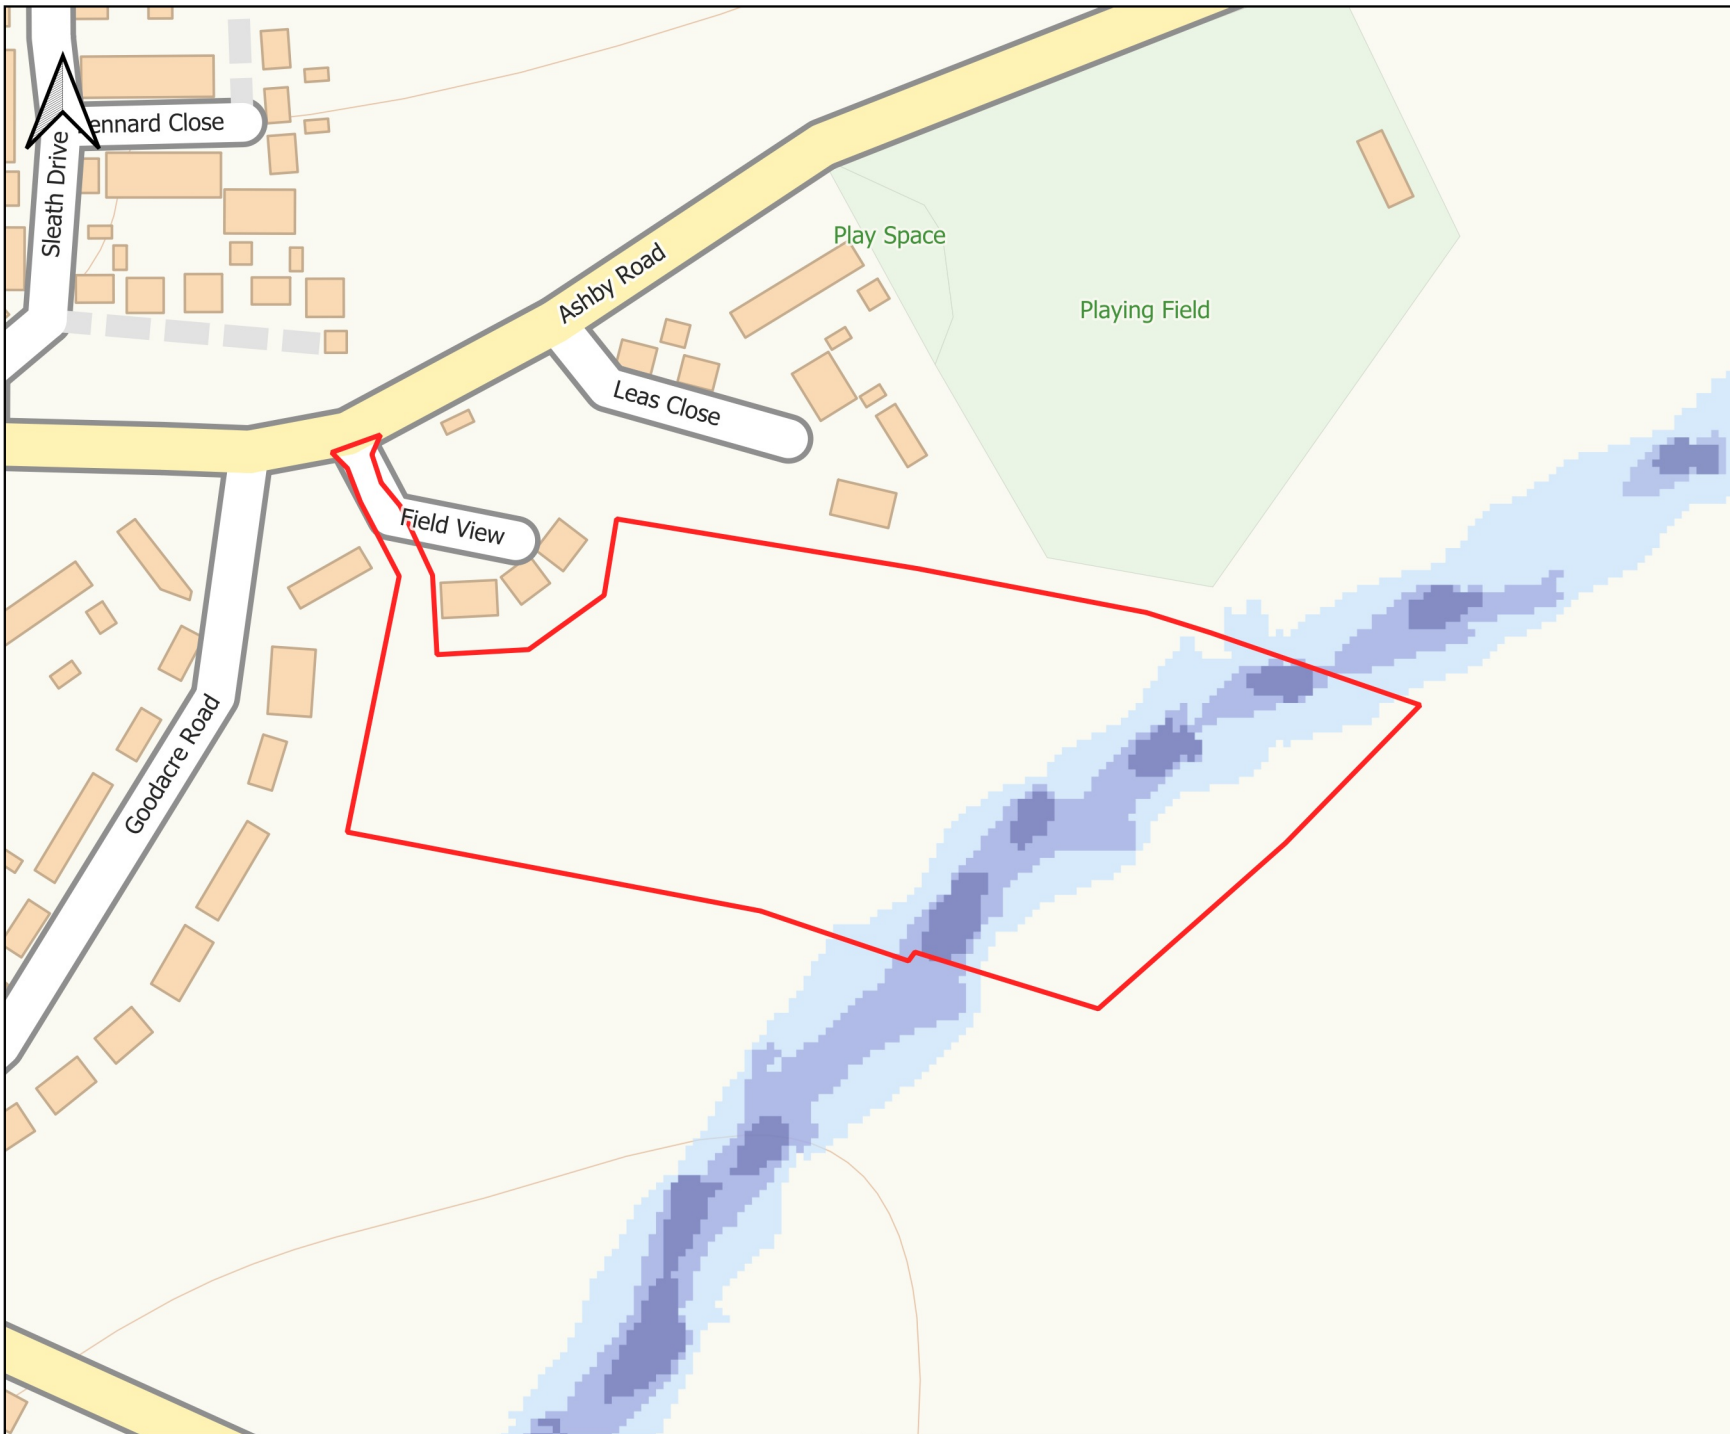

0 50 100 m

